



City of Sedona Public Works Department

102 Roadrunner Drive Sedona, AZ 86336

(928) 204-7111 • Fax: (928) 282-5348

To Whom It May Concern:

The City of Sedona, Arizona is issuing **Addendum #1** to the specifications and bid schedule as originally issued at the time of solicitation for bids for the **Uptown Northbound Roadway Improvements Project**. For any bid to be considered responsible and responsive, receipt of this addendum must be acknowledged.

As specified in the Instructions to Bidders, this Addendum, upon issuance, has become a part of the Contract Documents.

This Addendum contains 2 pages including this page; 1 changed bid sheet; 0 plan sheets; 2 revised Special Provision pages and 0 additional Technical Specification sheets. Any changed bid sheets shall be used in lieu of the originally issued bid sheets to submit a responsive bid.

This Addendum clarifies the following:

Bid Schedule

1. Replace the Phase 1 Bid Schedule on page 27 of the Contract Documents with the following:
 - a. Revised page 27 (Rev. 9/14/23) which removes Item 402.1.3 Dual Component Pavement Symbol (Shared Path Bike/Ped Symbol).

Special Provisions

2. Replace Pages 6 and 7 of the Special Provisions with accompanying revised Pages 6 and 7.
 - a. Removes Item 402.1.3 Dual Component Pavement Symbol (Shared Path Bike/Ped Symbol)
 - b. Revised Section 406 Traffic Signals

406.1 Construction Requirements

All traffic signal work shall conform to the latest editions of ADOT's Traffic Signals and Lighting Standard Drawings and ADOT's Standard Specifications for Road and Bridge Construction. The extensions on the existing video detection shall be salvaged and reused for the new video detection system. Additionally, the existing cabinet foundations are to be removed and replaced to meet the new controller cabinet assembly requirements.

All other work shall be per MAG Specifications and Details in Appendix B.

Questions and Answers

3. Email Questions and Answers:

- a. The specification note that the cabinet foundations are to remain, however the plans show that they are to be removed and replaced. Please confirm whether the foundations are to remain or to be removed and replaced.

Answer: Cabinet foundations shall be removed and replaced.

- b. There is a duplicate bid item for the symbols along the SUP – 4.3 in Phase 1 and 4.2 in Phase 2.

Answer: Remove bid item for SUP symbols from Phase 1.

This Addendum revises and adds the following:

- 1. Revised Bid Schedule
- 2. Revised Special Provision 406

ACKNOWLEDGEMENT


I have received **Addendum #1** for the **Uptown Northbound Roadway Improvements Project** as described above and acknowledge it as part of the Contract Documents for the project.

Signature

Date

Print Business Name

Addendum # 1 issued by Kurtis Harris, P.E., Director of Public Works/City Engineer, City of Sedona.

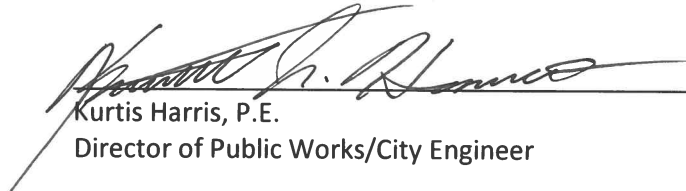

Kurtis Harris, P.E.
Director of Public Works/City Engineer

September 14, 2023

Date

4. TRAFFIC IMPROVEMENTS

4.1	402.1.1	Dual Component Pavement Symbol (Left Turn Arrow)	EA	3	\$	\$
4.2	402.1.2	Dual Component Pavement Symbol (Straight Arrow)	EA	4	\$	\$
4.3	402.1.3	Dual Component Pavement Symbol (Shared Path Bike/Ped)	EA	4	\$	\$
4.4	402.1.4	Dual Component Pavement Legend "Only"	EA	1	\$	\$
4.5	402.1.5	Dual Component Pavement Legend "89A"	EA	2	\$	\$
4.6	402.1.6	Dual Component Pavement Legend "179"	EA	2	\$	\$
4.7	402.2.1	4" White Solid Permanent Pavement Markings (Traffic Paint Stripe)	LF	699	\$	\$
4.8	402.2.2	4" White Broken Permanent Pavement Markings (Traffic Paint Stripe)	LF	1,988	\$	\$
4.9	402.2.3	18" White Stop Bar (Traffic Paint Stripe)	LF	17	\$	\$
4.10	402.2.4	Paint Median (Yellow)	LF	25	\$	\$
4.11	402.2.5	Paint Curb (Yellow)	LF	196	\$	\$
4.12	403.2	Flat Sheet Alum. Sign Panel, Diamond Grade	EA	3	\$	\$
4.13	404.1	Rigid Sign Stand	EA	3	\$	\$
4.14	406.1	Controller Cabinet Assembly	EA	2	\$	\$
4.15	406.2	Controller Cabinet Foundation	EA	2	\$	\$
4.16	406.3	3-Cam Video Detection System-3 approach	EA	1	\$	\$
4.17	406.4	2-Cam Video Detection System-2 approach	EA	1	\$	\$
4.18	406.5	Service Pedestal Foundation	EA	2	\$	\$
4.19	406.6	Electrical Service Pedestal System	EA	7	\$	\$
Subtotal						\$

5. LANDSCAPE AND IRRIGATION IMPROVEMENTS

5.1	430.1	Shrub – 5 Gallon	EA	75	\$	\$
5.2	430.2	Shrub - 1 Gallon	EA	323	\$	\$
5.3	430.3	Rock Mulch	SF	6,385	\$	\$
5.4	430.4	Landscape Establishment	LSUM	1	\$	\$
5.5	430.5	24" Decorative Boulder	EA	11	\$	\$
5.6	430.6	Tree – 15 Gallon	EA	4	\$	\$
5.7	440.1	Landscape Irrigation System	LSUM	1	\$	\$
Subtotal						\$

402.1 DUAL COMPONENT PAVEMENT MARKINGS

- A. Unless otherwise approved by the City Engineer (Sedona R/W) or ADOT Engineer (ADOT R/W), all final striping shall be reflectorized dual component epoxy placed over the existing striping 30 days after completion of the final pavement surface, or as directed by the Engineer. Work under this item shall be performed in accordance with ADOT Specifications Section 709 (Dual Component Pavement Markings).
1. Stop Bars and Crosswalks - Work under this item shall consist of the application of dual component pavement marking material at the locations noted on the project plans. All stop bars shall be 18 inches in width and crosswalk striping shall be 12 inches in width.
 2. Pavement Markings, Symbols, and Legend – Work under this item shall consist of the application of dual component pavement marking material at the locations noted on the project plans.

Measurement and Payment:

Measurement and Payment for pavement marking symbols or legend shall be at the per each basis for each symbol or legend installed in accordance with ADOT section 709-4 and 709-5.

- Pay Item:**
- 402.1.1 Dual Component Pavement Symbol (Left Turn Arrow)**
 - 402.1.2 Dual Component Pavement Symbol (Straight Arrow)**
 - 402.1.3 Dual Component Pavement Legend “Only”**
 - 402.1.4 Dual Component Pavement Legend “89A”**
 - 402.1.5 Dual Component Pavement Legend “179”**

402.2 PERMANENT PAVEMENT MARKINGS

- A. Work under this item shall be performed per ADOT Specifications Section 708. Shared Use Path Striping shall be “Suede Vest” by Dunn Edwards DE5279, no reflective glass beads.

Measurement and Payment:

Measurement shall be in accordance with ADOT Section 708-4 (Width times Length divided by 4 inches equals LF as shown in bid schedule).

Payment shall be in accordance with ADOT Section 708-5.

- Pay Item:**
- 402.2.1 4” White Solid Permanent Pavement Markings (Traffic Paint Stripe) (LF)**
 - 402.2.2 4” White Broken Permanent Pavement Markings (Traffic Paint Stripe) (LF)**
 - 402.2.3 18” White Stop Bar (Traffic Paint Stripe) (LF)**
 - 402.2.4 Paint Median (Yellow) (LF)**
 - 402.2.5 Paint Curb (Yellow) (LF)**
 - 402.2.6 4” Single Dashed SUP Striping (LF)**
 - 402.2.7 Bike and Pedestrian SUP Legend (EA)**

403 PERMANENT SIGNING, SIGN POSTS AND DELINEATORS

TS403.4 Measurement and Payment: ADD the following:

Measurement and payment shall be the unit price per each for posts and sign panels, complete and in place including the sign post foundations.

Payment for the removal and reinstall of the existing signs shall be at the unit price of each and shall include the removal and disposal of existing foundation and post.

- Pay Item: 403.1 Perforated Sign Post and Post Foundation (EA)**
403.2 Flat Sheet Aluminum Sign Panel, Diamond Grade (EA)

404 TEMPORARY SIGNING, SIGN POSTS AND DELINEATORS

TS404.4 Measurement and Payment: ADD the following:

Measurement and payment shall be the unit price per each for temporary sign stands and sign panels.

- Pay Item: 404.1 Rigid Sign Stand (EA)**

406 TRAFFIC SIGNALS

406.1 Construction Requirements

All traffic signal work shall conform to the latest editions of ADOT's Traffic Signals and Lighting Standard Drawings and ADOT's Standard Specifications for Road and Bridge Construction. The extensions on the existing video detection shall be salvaged and reused for the new video detection system. Additionally, the existing cabinet foundations are to be removed and replaced to meet the new controller cabinet assembly requirements.

All Other work shall be per MAG Specifications and Details in Appendix B.

406.2 Measurement and Payment

- Pay Item: 406.1 Controller Cabinet Assembly (EA)**
406.2 Controller Cabinet Foundation (EA)
406.3 3-Camera Video Image Detection System – Detection for 3 Approaches (EA)
406.4 2-Camera Video Image Detection System – Detection for 2 Approaches (EA)
406.5 Service Pedestal Foundation (EA)
406.6 Electrical Service Pedestal System (EA)

430 LANDSCAPE AND PLANTING

430.8 Plant Guarantee and Maintenance: REMOVE AND REPLACE with the following:

The Contractor shall insure that all plant materials (shrubs and trees) are in a sound, healthy, vigorous condition free from insects, bark abrasions, or other objectionable disfigurements at time of planting. Contractor shall immediately replace any shrub which is unacceptable at any time up to and including final acceptance of the project or completion of the plant establishment period whichever occurs later. The Contractor is responsible for hand-watering the shrubs for the duration of the landscape establishment period to promote establishment and maintain plant health. The Contractor is not responsible for the guarantee or maintenance of the trees that are planted as part of this project. The care and maintenance of the trees, including watering, is the