


June 04, 2026

ADDENDUM

No. 3

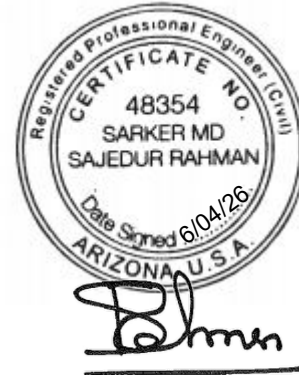

TO ALL CONTRACTORS AND OTHERS INTERESTED IN PROJECT

085 MA 004 F0833 01C

085-A(210)T

GILA BEND – LUKEVILLE HIGHWAY (SR 85)
QILOTOSA WASH - W THAYER RD

SCHEDULED FOR BID OPENING ON
FRIDAY, JUNE 05, 2026, AT 11:00 A.M. (M.S.T.)

REVISIONS TO THE PROJECT PLANS:

Attached are revised sheets 2, 3, 5, 6, 7, 8, 9, 10 & 11 of 30 of the project plans. Remove sheets 2, 3, 5, 6, 7, 8, 9, 10 & 11 of 30 from the project plans, attach the revised sheets, and be guided accordingly.

REVISIONS TO THE BID SCHEDULE:

Attached is the revised Bid Schedule. Remove the Bid Schedule from your proposal pamphlet, insert the revised Bid Schedule and be guided accordingly.

For Brahma Singh, PE,
Group Manager,
Contracts & Specifications

Attachment:

Revised Plan Sheets 2, 3, 5, 6, 7, 8, 9, 10 & 11 of 30,
Revised Bid Schedule,



ARIZONA DEPARTMENT OF TRANSPORTATION
PROJECT DELIVERY AND OPERATIONS DIVISION
CONTRACTS AND SPECIFICATIONS GROUP

BID SCHEDULE

CONTRACT # 2025101

TRACS No.	Project No.	Item	County	District	Gross Length	Net Length	Prepared By:
085 MA 004 F083301C	085-A-(210)T	105125	MARICOPA	SOUTHWEST	1.6		Vian Rashid

Highway Termini	Location	Work Description
• GILA BEND – LUKEVILLE HIGHWAY (SR 85)	• QILOTOSA WASH W THAYER RD	• DRAINAGE IMPROVEMENTS

BID SCHEDULE**085 MA 004 F083301C**

Item No.	Item Description	Unit	Quantity	Unit Price	Extended Amount
2010011	CLEARING AND GRUBBING	ACRE	2		
2020029	REMOVAL OF ASPHALTIC CONCRETE PAVEMENT	SQ.YD.	108		
2020052	REMOVE (EXISTING WALL)	L.FT.	71		
2020053	REMOVE (SURVEY MARKER)	EACH	2		
2020071	REMOVE GUARD RAIL	L.FT.	360		
2020101	REMOVE FENCE	L.FT.	1,717		
2030401	DRAINAGE EXCAVATION	CU.YD.	104		
3030022	AGGREGATE BASE, CLASS 2	CU.YD.	15		
4090003	ASPHALTIC CONCRETE (MISCELLANEOUS STRUCTURAL)	TON	23		
7010025	TEMPORARY IMPACT ATTENUATION DEVICE (IN-LINE ENERGY ABSORBING TERM.)	EACH	20		
7010026	TEMPORARY IMPACT ATTENUATION DEVICE (IN-LINE ENERGY ABSORBING TERM.) (IN USE)	EACH-DAY	1,036		
7015010	TEMPORARY CONCRETE BARRIER (INSTALLATION AND REMOVAL)	L.FT.	4,200		
7015052	OBLITERATE PAVEMENT MARKING (STRIPE)	L.FT.	4,800		
7016020	TEMPORARY CONCRETE BARRIER (IN USE)	L.FT.-DAY	155,394		

BID SCHEDULE**085 MA 004 F083301C**

Item No.	Item Description	Unit	Quantity	Unit Price	Extended Amount
7016030	BARRICADE (TYPE 1, TYPE 2, VERT.PANEL, TUBULAR MARKER)	EACH-DAY	12,958		
7016032	PORTABLE SIGN STAND (RIGID)	EACH-DAY	50		
7016033	PORTABLE SIGN STAND (SPRING TYPE)	EACH-DAY	160		
7016035	WARNING LIGHT (TYPE A)	EACH-DAY	6,422		
7016037	WARNING LIGHT (TYPE C)	EACH-DAY	12,958		
7016038	TRAFFIC CONE	EACH-DAY	50		
7016039	EMBEDDED SIGN POST	EACH-DAY	9,964		
7016050	TRUCK-MOUNTED ATTENUATOR	EACH-DAY	125		
7016051	TEMPORARY SIGN (LESS THAN 10 S.F.)	EACH-DAY	2,550		
7016052	TEMPORARY SIGN (10 S.F. OR MORE)	EACH-DAY	3,874		
7016067	CHANGEABLE MESSAGE BOARD (CONTRACTOR FURNISHED)	EACH-DAY	562		
7016071	PILOT VEHICLE WITH DRIVER	HOURL	40		
7016075	FLAGGING SERVICES (CIVILIAN)	HOURL	288		
7016081	FLAGGING SERVICES (DPS)	HOURL	194		

BID SCHEDULE**085 MA 004 F083301C**

Item No.	Item Description	Unit	Quantity	Unit Price	Extended Amount
7016082	FLAGGING SERVICES (LOCAL ENFORCEMENT OFFICER)(WITH AGENCY VEHICLE)	HOUR	154		
7017020	TEMPORARY AND PORTABLE TRAFFIC CONTROL SIGNAL (INSTALL & REMOVE)	L.SUM	1		
7017025	TEMPORARY AND PORTABLE TRAFFIC CONTROL SIGNAL (IN USE)	DAY	168		
7040005	PAVEMENT MARKING (WHITE EXTRUDED THERMOPLASTIC) (0.090")	L.FT.	4,500		
7040006	PAVEMENT MARKING (YELLOW EXTRUDED THERMOPLASTIC) (0.090")	L.FT.	1,800		
7060015	PAVEMENT MARKER, RAISED, TYPE D	EACH	40		
7080201	WATERBORNE-TYPE I PAVEMENT MARKING (PAINTED) (WHITE)	L.FT.	12,000		
7080202	WATERBORNE-TYPE I PAVEMENT MARKING (PAINTED) (YELLOW)	L.FT.	2,400		
8050003	SEEDING (CLASS II)	ACRE	4		
8101023	EROSION CONTROL (WATTLES) (12")	L.FT.	1,200		
8101029	EROSION CONTROL (ROCK MULCH) (GRADATION C)	CU.YD.	120		
9010001	MOBILIZATION	L.SUM	1		

BID SCHEDULE**085 MA 004 F083301C**

Item No.	Item Description	Unit	Quantity	Unit Price	Extended Amount
9030012	BARBED WIRE FENCE, TYPE 2	L.FT.	1,445		
9090003	SURVEY MONUMENT (C-21.20)	EACH	2		
9130001	RIPRAP (DUMPED)	CU.YD.	1,221		
9240170	CONTRACTOR QUALITY CONTROL	L.SUM	1		
9240181	MISCELLANEOUS WORK (CONTROL OF NOXIOUS PLANTS)(MANUAL / MECHANICAL METHODS)	SQ.YD.	9,000		
9240182	MISCELLANEOUS WORK (CONTROL OF NOXIOUS PLANTS)(HERBICIDE)	SQ.YD.	11,000		
9250001	CONSTRUCTION SURVEYING AND LAYOUT	L.SUM	1		
9280034	GROUND-IN RUMBLE STRIP (6 INCH)	L.FT.	3,000		
9280036	GROUND-IN RUMBLE STRIP (8 INCH)	L.FT.	6,000		

BID SCHEDULE**085 MA 004 F083301C**

Item No.	Item Description	Unit	Quantity	Unit Price	Extended Amount
Culvert #1: Station1892+36.49, MP 6.02,					
2020009 A	REMOVAL OF STRUCTURAL CONCRETE	CU.YD.	13		
2030501 A	STRUCTURAL EXCAVATION	CU.YD.	91		
2030508 A	STRUCTURE BACKFILL	CU.YD.	96		
6010002 A	STRUCTURAL CONCRETE (CLASS S) (F'C = 3,000)	CU.YD.	175		
6050002 A	REINFORCING STEEL	LB.	28,923		
6050101 A	PLACE DOWELS	EACH	30		

BID SCHEDULE

085 MA 004 F083301C

Item No.	Item Description	Unit	Quantity	Unit Price	Extended Amount
----------	------------------	------	----------	------------	-----------------

Culvert #2: Station 1929+76.48, MP 5.30,

2020009 B	REMOVAL OF STRUCTURAL CONCRETE	CU.YD.	56		
2030501 B	STRUCTURAL EXCAVATION	CU.YD.	263		
2030508 B	STRUCTURE BACKFILL	CU.YD.	195		
6010002 B	STRUCTURAL CONCRETE (CLASS S) (F'C = 3,000)	CU.YD.	451		
6050002 B	REINFORCING STEEL	LB.	53,678		
6050101 B	PLACE DOWELS	EACH	56		

BID SCHEDULE**085 MA 004 F083301C**

Item No.	Item Description	Unit	Quantity	Unit Price	Extended Amount
----------	------------------	------	----------	------------	-----------------

Culvert #3: Station 1944+17.39, MP 5.01,

2020009	C	REMOVAL OF STRUCTURAL CONCRETE	CU.YD.	27		
2030501	C	STRUCTURAL EXCAVATION	CU.YD.	94		
2030508	C	STRUCTURE BACKFILL	CU.YD.	77		
6010002	C	STRUCTURAL CONCRETE (CLASS S) (F'C = 3,000)	CU.YD.	216		
6050002	C	REINFORCING STEEL	LB.	28,695		
6050101	C	PLACE DOWELS	EACH	22		

BID SCHEDULE**085 MA 004 F083301C**

Item No.	Item Description	Unit	Quantity	Unit Price	Extended Amount
----------	------------------	------	----------	------------	-----------------

Culvert #4: Station 1960+87.49 MP 4.71

2020009	D	REMOVAL OF STRUCTURAL CONCRETE	CU.YD.	9		
2030501	D	STRUCTURAL EXCAVATION	CU.YD.	43		
2030508	D	STRUCTURE BACKFILL	CU.YD.	68		
6010002	D	STRUCTURAL CONCRETE (CLASS S) (F'C = 3,000)	CU.YD.	90		
6050002	D	REINFORCING STEEL	LB.	12,659		
6050101	D	PLACE DOWELS	EACH	20		

BID SCHEDULE

085 MA 004 F083301C

Item No.	Item Description	Unit	Quantity	Unit Price	Extended Amount
Culvert #5: Station 1976+68.14 MP 4.39,					
2020009 E	REMOVAL OF STRUCTURAL CONCRETE	CU.YD.	15		
2030501 E	STRUCTURAL EXCAVATION	CU.YD.	62		
2030508 E	STRUCTURE BACKFILL	CU.YD.	76		
6010002 E	STRUCTURAL CONCRETE (CLASS S) (F'C = 3,000)	CU.YD.	145		
6050002 E	REINFORCING STEEL	LB.	22,147		
6050101 E	PLACE DOWELS	EACH	20		

BID TOTAL :